


Superb
cat. C


100% polyester TREVIRA®
Flame retardant - 100.000 Martindale



5101

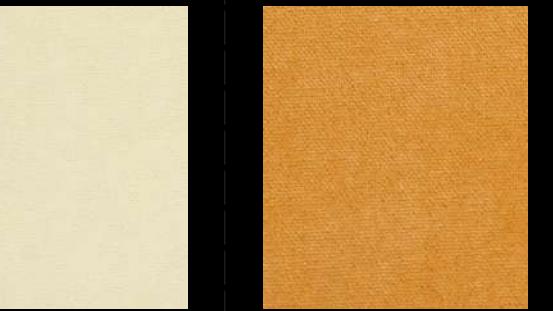

5103



5107



5106




5110



5111




5112



5123




5124



5114



5113

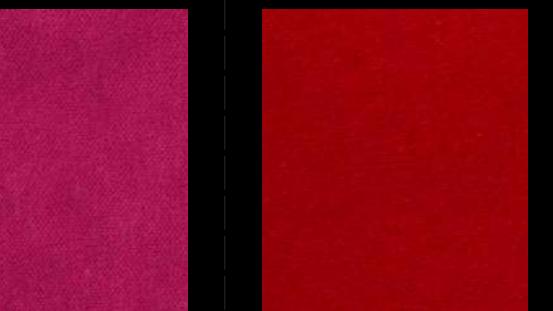


5121



5116



5118



5119



5152




5151



5150




5147



5144



5143

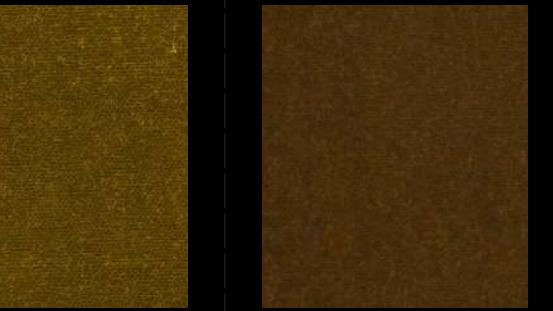


5141




5142



5145



5146



5149




5139



5137



5136



5135



5140




5131




5132



5133



5134



5130




5125



5126



5127



5128

Technical details

Superb

Composition	100% polyester TREVIRA®
Weight	Gr./m ² 400
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 5
Pilling	ISO 12945-2: 5
Fastness to rubbing	ISO 105-X12: Wet 4 Dry 4
Flame retardant	UNI 8456 – 9174 classe 1 UNI 9175 classe 1IM EN 1021-1 EN 1021-2 BS 5852 crib 5 DIN 4102 B1 NF P 92 503-507 M1 TB 117:2013 UNI EN 13773:2004 classe 1 NFPA 701:2015 IMO FTP CODE 2010
Features	TEAR STRENGHT SOUND ABSORBING