


605




403

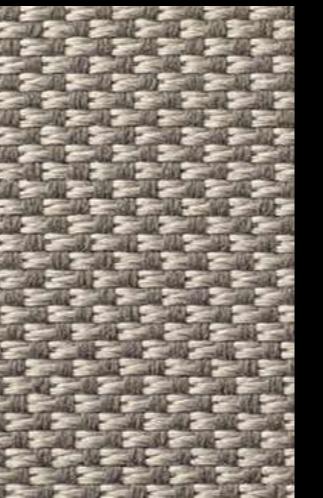

603



604

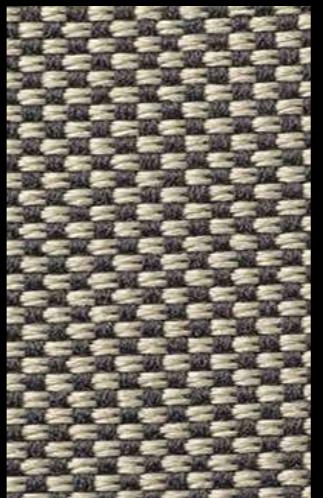

406



607



308



605




404



302




306

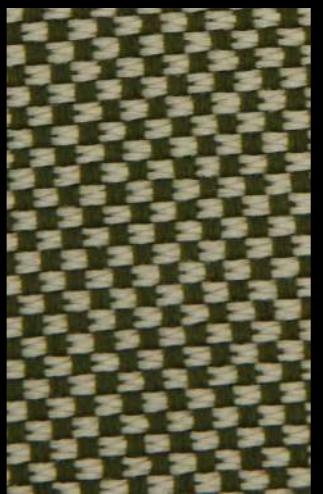

802



703

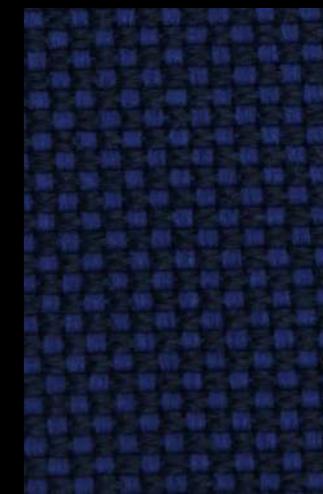

707

Nox

cat. Super

100% recycled PET
Flame retardant - 100.000 Martindale

Nox

eco-sustainable

Technical details

| | |
|---------------------|---|
| Composition | 100% recycled PET - 100% recyclable |
| Weight | Gr./ml. 800 |
| Abrasion test | Martindale - ISO 12947-2: 100.000 rubs |
| Lightfastness | ISO 105-B02: 7 |
| Pilling | ISO 12945-2: 4/5 |
| Fastness to rubbing | ISO 105-X12: Wet 4 Dry 4/5 |
| Flame retardant | Classe 1 IM - UNI 9175 EN 1021-1+2 BS5852:2006 cig.+flame California test (Tb117 + AB2998) |
| Environment | 100% RECYCLABLE OEKO -TEX 100 CERTIFIED |