

Sisu

cat. Special


91% new Norwegian wool 8% new New Zealand wool 1%
Flame retardant - 70.000 Martindale



0105



0125

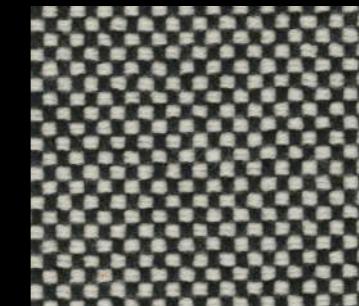

0165



0175




0195



0225




0375

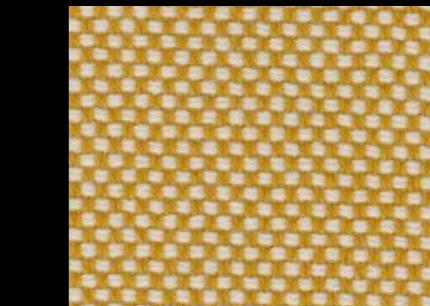

0405




0525

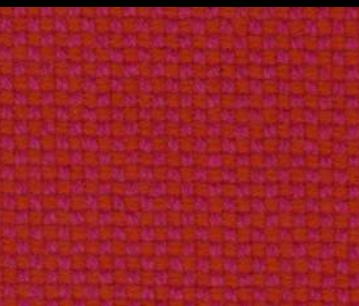

0645



0655

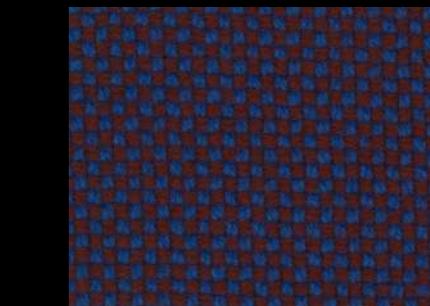


0765




0775



0785

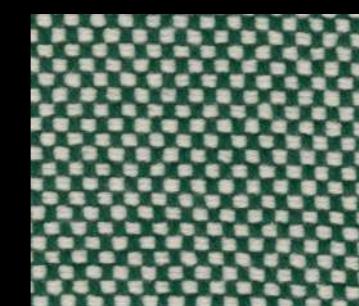

0805

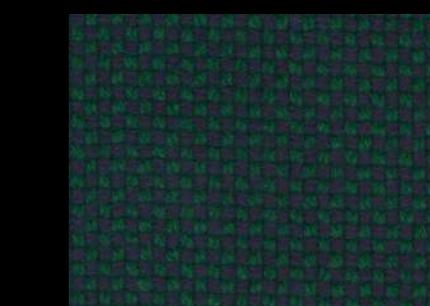

0885

Sisu

eco-sustainable

Technical details

| | |
|---------------------|---|
| Composition | 91% new Norwegian wool 8% new New Zealand wool 1% nylon |
| Weight | Gr./m ² 1.100 |
| Abrasion test | Martindale - ISO 12947-2: 70.000 rubs |
| Lightfastness | ISO 105-B02 7 |
| Pilling | ISO 12945-2: 3/4 |
| Fastness to rubbing | ISO 105-X12: Wet 4-5 / Dry 4-5 |
| Flame retardant | AS/NZS 3837 class 2 ASTM E84 Class B Adhered ASTM E84 Class B Unadhered BS 5852 part 1 EN 1021-1/2 IMO FTP Code 2010 Part 8 NF D 60 013 UNI 9175 1IM US Cal. Bull. 117-2013 |
| Environment | GREENGUARD CERTIFICATION GREENGUARD GOLD CERTIFICATION HPD EPD |