




Geiko

cat. B

40% PL; 30% PL RECYCLED; 30% PP RECYCLED

Flame retardant - 70.000 Martindale

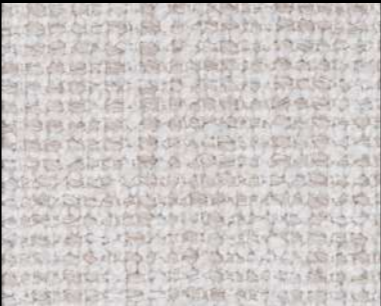

021 gesso



014 cenere




02 fango



07 bruciato



01 tabacco

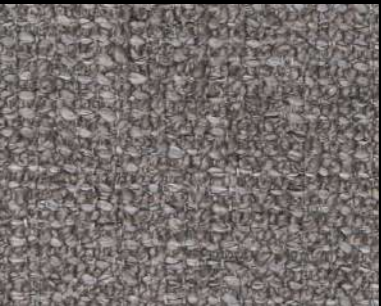

016 tortora



04 oliva



018 asfalto

Geiko

Technical details

Composition	40% PL; 30% PL RECYCLED; 30% PP RECYCLED
Weight	Gr./ml 850
Abrasion test	Martindale - ISO 12947-2: 70.000 rubs
Lightfastness	ISO 105-B02: 4/5
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: 4/5
Flame retardant	BS 5852-1:1979 EN 1021-Part 1 CALIFORNIA BULLETIN TB 117:2013